
 VOLUMEN (l)  
VOLUMEN (l)









 MAX. OBREMENITEV (Kg)  
MAX. OBTEREČENJE (Kg)

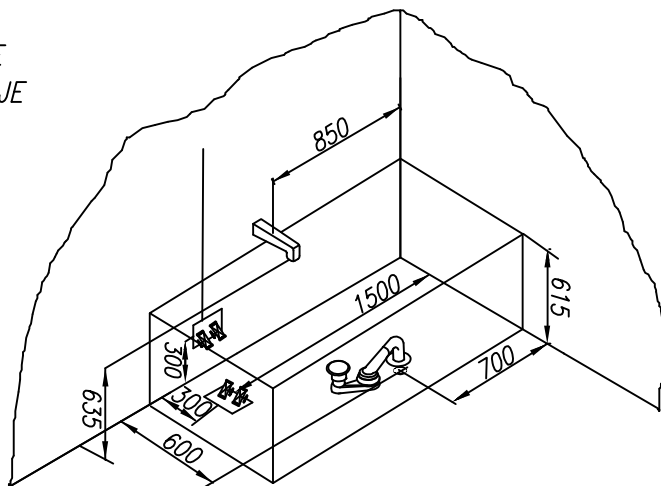
 OBREMENITEV TAL (Kg/m<sup>2</sup>)  
OBTEREČENJE PODA (Kg/m<sup>2</sup>)

240

370

275

-  - Prostor za el. vodnik 3 x 2,5 mm<sup>2</sup>, dolžine cca 1m.
-  - Mjesto za el. vodnik 3 x 2,5 mm<sup>2</sup>, dužine cca 1m.
-  - Prostor za el. vodnik 1 x 6 mm<sup>2</sup> za ozemljitev, dolžine cca 1,5m.
-  - Mjesto za el. vodnik 1 x 6 mm<sup>2</sup> za ozemljenje, dužine cca 1,5m.
-  - Priklop tople in hladne vode 1/2" min 0,2 Mpa, max 0,4 Mpa
-  - Priključak tople i hladne vode 1/2" min 0,2 Mpa, max 0,4 Mpa
-  - Prostor za odtok ø 50 mm
-  - Mjesto za odtok ø 50 mm

 PREDLOG VGRADNJE  
PRIJEDLOG UGRADNJE

 Priporočena prelivna garnitura  
Preporuka prelivne garniture

PAL 650

 Priporočila za vgradnjo kadi brez obloge  
Preporuka za ugradnjo kade bez obloge

Nr. MK 03

 Opcija podnožja kadi za vgradnjo  
Varianta postolja za kade bez obloge

 Nr. MK 05  
PKK 501